

Life cycle management and recycling of PV systems

Recycling | The end-of-life handling of PV equipment is becoming an important element in the total life cycle costs of PV generation assets. Parikhit Sinha, Sukhwant Raju, Karen Drozdiak and Andreas Wade of First Solar look at the growing importance of PV recycling

In 2015, estimated annual global volumes of electronic waste (e-waste) reached a record 43.8 million metric tons and global e-waste generation is expected to increase up to 50 million metric tons by 2018 [1]. Even though solar PV panels significantly differ from typical consumer electronic products, global regulators view PV panels increasingly in the context of e-waste regulations. Solar PV currently accounts for less than 1% of total annual e-waste volumes. However, as PV deployment continues to grow exponentially, cumulative PV waste is expected to amount to 1.7 million-8 million metric tons by 2030, equivalent to 3-16% of total e-waste produced annually today [2]. As global PV demand increases and more modules and systems reach the end of their useful life over the next 10-15 years, recycling will become increasingly important for all PV technologies to ensure that clean energy solutions do not pose a waste burden.

In addition to ensuring compliance with evolving regulatory waste management requirements, PV recycling offers an opportunity to influence project economics in an increasingly commoditised market. As component prices continue to drop, the financial provisions related to decommissioning, collection and recycling become more relevant to the levelised cost of electricity (LCOE) for PV generation assets. These provisions have to be taken into consideration during PV project development, site permitting and when putting PV system components on the market (i.e. PV modules, inverters, other electrical and electronic products).

Voluntary and regulatory approaches to end-of-life management in leading markets

In most countries, PV panels are classified as general or industrial waste and managed in accordance with general waste treatment and disposal requirements [2]. Beyond

general waste regulation, voluntary and regulatory approaches have been specifically developed for managing end-of-life PV waste.

The European Union (EU) was the first to adopt PV-specific waste regulations by mandating the recycling of all solar panels under the Waste Electrical and Electronic Equipment (WEEE) Directive (2012/19/EU). Since 2012, the provisions of the WEEE Directive have been transposed into national law by the EU member states, creating the first mandatory market for PV module recycling. In the United States, PV panel disposal is covered under the Resource Conservation and Recovery Act, which is the legal framework for managing hazardous and non-hazardous waste. In 2016, the US Solar Energy Industries Association (SEIA) partnered with PV manufacturers and installer-developers to voluntarily launch a national PV recycling programme, which aims to make affordable PV recycling solutions more accessible to consumers [3].

In Japan, end-of-life PV panels are covered under the general regulatory framework for waste management (the Waste Management and Public Cleansing Act), which defines industrial waste generator and handler responsibilities and waste management requirements including landfill disposal. In 2015, a roadmap for promoting a scheme for collection, recycling and proper treatment of end-of-life renewable energy equipment was developed, followed in 2016 by a guideline promoting proper end-of-life treatment of PV modules including recycling [2].

China has no PV-specific waste regulations but has sponsored R&D on PV recycling technologies through the National High-tech R&D Programme for PV Recycling and Safety Disposal Research under the 12th five-year plan. Directives for accelerating the end-of-life management of waste PV modules are also expected in the 13th five-year plan. In India, PV waste is managed


by the Ministry of Environment, Forest and Climate Change under the 2016 Solid Waste Management Rules and the Hazardous and Other Wastes (Management and Transboundary Movement) Rules [2].

Internationally, a new sustainability leadership standard for PV modules (NSF 457) includes product end-of-life management criteria covering take-back and recycling.

PV recycling technology

In recent years, R&D projects on PV recycling technology have been sponsored in Europe, China, Japan and Korea, and there has been significant patent activity for both crystalline silicon (c-Si) and thin-film PV module recycling technology in the same regions as well as in the United States [4]. Recycling technology can be categorised as either bulk recycling (recovery of high-mass fraction materials such as glass, aluminum and copper) or high-value recycling (recovery of both bulk materials and semiconductor and trace metals). Bulk recycling is similar to existing laminated glass recycling technology in other industries, and may not recover environmentally sensitive (e.g., Pb, Cd, Se) or valuable (e.g., Ag, In, Te, solar-grade Si) materials in PV modules. High-value PV recycling consists of three main steps: pretreatment to remove the metal frame and junction box, delamination

Figure 1. High value PV recycling process steps

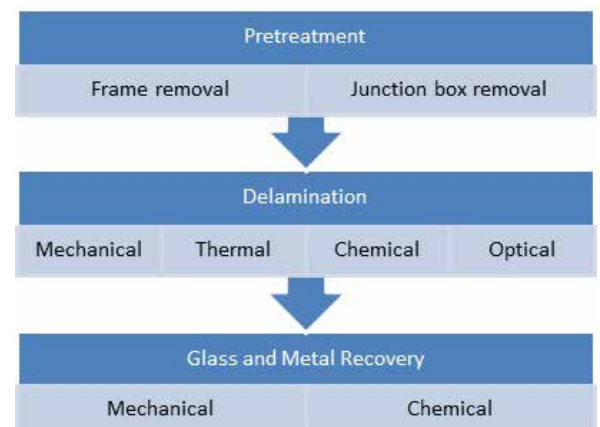

to remove the module encapsulant and recovery to extract glass and metals from the module (Figure 1).

Some common goals in PV recycling technology are to maximise recovery yields, minimise impurities in the products of recycling and minimise capital and operating costs to be competitive with other disposal options. Ensuring worker safety and environmental protection are additional priorities that are implemented through management systems such as OHSAS 18001 and ISO 14001, and air emissions controls and wastewater treatment technology.

In addition to technology, other related considerations that affect the viability of PV recycling are effective collection schemes, predictable waste volumes, customers for the products of recycling and regulations on the handling and transport of waste. These factors can affect commercial decisions on when and where to site PV recycling facilities and whether to operate them in a centralised or decentralised (mobile) manner [5].

The recovery value of a PV module

PV panels typically consist of glass, aluminum, copper and semiconductor materials that can be successfully recovered and reused at the end of their useful life (Figure 2). By mass, today’s typical crystalline silicon PV panels consist of approximately 76% glass, 10% polymer (encapsulant and backsheet foil), 8% aluminium, 5% silicon semiconductor, 1% copper (interconnectors) and less than 0.1% silver (contact lines) and other metals including tin and lead. Thin-film CIGS and CdTe PV panels consist of higher proportions of glass: 89% and 97%, respectively [2].

Current PV waste volumes remain low as modules have a lifetime of 25 years or more. However, as global PV deployment continues to grow and more modules reach the end of their useful life over the next 10-20 years, PV waste is set to increase nearly 40-fold by 2030 under a normal loss scenario, which assumes a 30-year module lifetime. Leading solar markets includ-

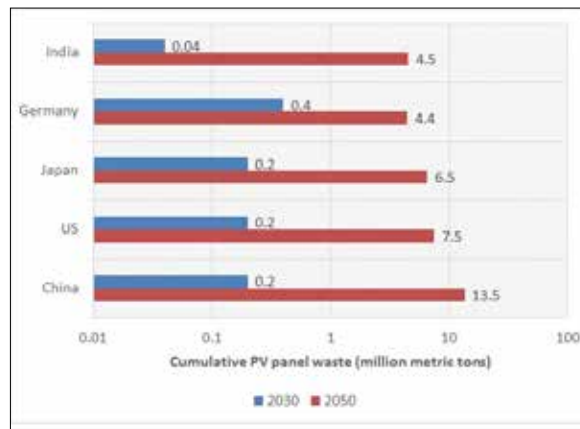
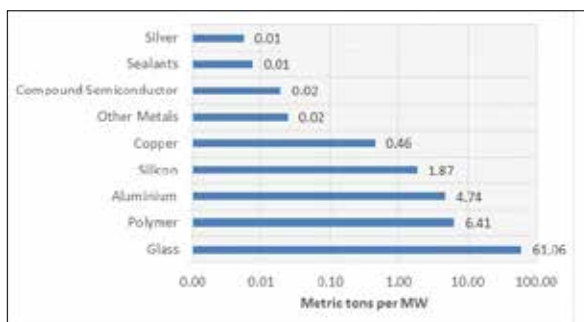


Figure 3. Estimated cumulative PV waste volumes in leading solar markets by 2030 and 2050 (regular loss scenario) [2]

ing China, the US, Germany, Japan and India (Figure 3) are expected to represent the majority of these projected PV waste streams [2].

By 2030, the recoverable value from recycling end-of-life PV modules is estimated to amount to US\$450 million. The recovery value of glass alone has the potential to exceed US\$28 million, assuming an average secondary material market price of US\$30-50/mt depending on recovery quality of the glass [6].

In Europe, the current raw material recovery rate for recycling PV modules is 65-70% by mass and is in line with the EU WEEE Directive. CENELEC, the European Committee for Electrotechnical Standardisation, has developed a supplementary standard specific to PV panel collection and treatment (EN50625-2-4 & TS50625-3-5) to assist treatment operators. The standard specifies various administrative, organisational and technical requirements aimed at preventing pollution and improper disposal, minimising emissions, promoting increased material recycling and high-value recovery operations, and impeding PV waste shipments to facilities that fail to comply with standard environmental and health and safety requirements. The standard includes specific depollution requirements whereby the content of hazardous substances in output glass fractions shall not exceed the following defined limit values:

- 1 mg/kg (dry matter) cadmium (Si-based PV); 10 mg/kg (dry matter) cadmium (non-Si-based PV)
- 1 mg/kg (dry matter) selenium (Si-based PV); 10 mg/kg (dry matter) selenium (non-Si-based PV)
- 100 mg/kg (dry matter) lead

The residual value of a PV system at end-of-life

Decommissioning cost modelling

Decommissioning a PV system at end-of-life involves dismantling and disposing of the

system. For utility-scale PV projects, local permitting requirements often include stringent decommissioning and land remediation measures [7] [8]. These specify disconnecting the project from the grid, removing the installed features (modules, trackers, electrical wire, inverters, transformers, fencing, O&M building, etc.), and recontouring and revegetating the land to its preconstruction condition. For example, the following utility-scale PV projects in the US and Germany have decommissioning plans containing detailed cost estimates for dismantling, disposal and site restoration.

- Desert Stateline Solar Farm Project (300 MW_{AC} PV project in California) [7];
- Helmeringen I Solar Park (10 MW_{AC} PV project in Germany) [8];
- Silver State South Solar Project (250 MW_{AC} PV project in Nevada) [9].

Costs from these and other representative projects can be aggregated and used to model the present value of the net cost to decommission a PV power plant (NDCPV):

$$NDC_{PV} = \frac{[(DC_T + IC_T + MR_T + LF_T) - SV_T - LV_T]}{(1+r)^T}$$

where,

- DC_T + IC_T = Direct cost (labour, equipment) and indirect cost of PV plant de-installation, demolition, recovery, and land reclamation in year T.
- MR_T = PV module recycling cost in year T.
- LF_T = Landfill disposal cost in year T, including landfill tipping fees and hauling, of non-salvageable material.
- SV_T = Scrap value of steel, copper and aluminum recovered during PV solar field and power equipment removal and sold to recyclers at prices prevailing in year T.
- LV_T = Value of reclaimed land in year T.
- r = Rate of annual discount applied to costs and revenues realised in year T.

In order for net costs to be negative (profitable), the scrap metal value and/or land value must exceed the decommissioning costs. In particular, there are large quantities of steel, copper and aluminum in PV power plants (Figure 4) associated with mounting structures and electrical cables.

Recent economic analysis indicates that the commercial scrap value of PV power plant decommissioning (mainly associ-

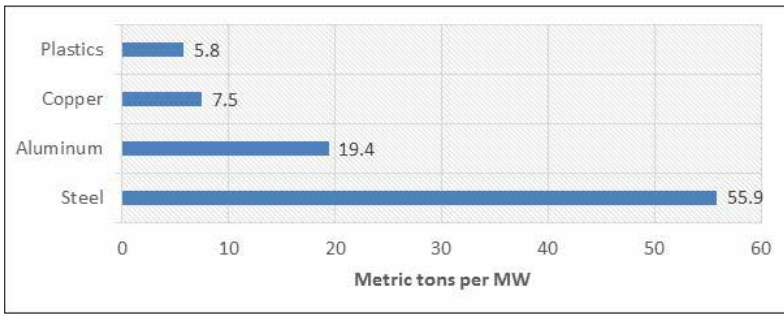


Figure 4. Material fractions of PV power plants [10]

First Solar’s first-generation recycling technology was based on the mining industry and involved moving glass and liquid from process to process with a modest 10 metric tons per day capacity. In 2011, First Solar developed its second-generation recycling technology, which was based on the chemical industry batch process of circulating liquids within scalable reactor columns (30 metric tons per day capacity).

In 2015, First Solar developed its third-generation recycling technology which achieves superior glass and semiconductor purity with reduced capital and operating (chemicals, waste and labour) costs. The continuous-flow process improves the recycling efficiency and throughput, increasing the plant’s daily recycling capacity from 30 metric tons to 150 metric tons.

First Solar is proactively investing in recycling technology improvements to drive down overall PV waste collection and recycling costs. By 2018, First Solar recycling plants will have zero liquid waste discharge and will convert most of the incoming PV waste streams into valuable raw materials for other industries.

ated with scrap steel and copper) exceeds decommissioning costs, incentivising recycling over disposal. Decommissioning cost optimisation modelling by Fthenakis et al. [11] estimated a net profit of up to US\$1.58 per module area. Monte Carlo analysis by ERM [12] indicated 100% confidence in a net profit from PV plant decommissioning when land value was included and up to 95% confidence in a net profit when land value was excluded, depending on plant design scenarios such as above-ground versus below-ground cabling. High-value recycling scenarios in both studies indicate opportunities to positively influence project economics and the LCOE of a given PV project, with net revenues of up to US\$0.01-0.02/W from project decommissioning (excluding land value).

State-of-the-art: the First Solar recycling process

In 2005, First Solar established the industry’s first voluntary global module recycling programme and has been proactively investing in recycling technology improvements and driving down recycling costs ever since (figures 5-7). In contrast to mechanical recycling processes which focus on recovering major components such as glass, copper and aluminum, First Solar’s high-value recycling process is able to recapture more materials while retaining their maximum value so they can be reused in new First Solar modules and new glass or rubber products. First Solar’s state-of-the-art PV recycling process recovers more than 90% of the semiconductor material and approximately 90% of glass.

SOLAR FINANCE & INVESTMENT EUROPE

30-31 JANUARY 2018
London, UK

Secondary Markets | Zero Subsidy Solar | Corporate PPAs | European Tenders

Returning for a 5th successive year, The Solar Finance & Investment Conference is firmly established as the must-attend event for developers, asset owners and debt providers involved in the European solar market.

Join us in 2018 to find out about

- Primary and secondary markets
- How to attract capital in a mature market
- Who owns European solar assets and how can you manage them?
- Who is buying and who is selling Europe’s 100GW of operational solar?
- What does a European developer need to know in emerging markets in order to be competitive?

finance.solarenergyevents.com

marketing@solarmedia.co.uk



Figure 5. First Solar's first-generation recycling technology based on the mining industry's batch process



Figure 6. First Solar's second-generation recycling technology based on the chemical industry's batch process



Figure 7. First Solar's third-generation PV recycling technology based on a continuous-flow process

Conclusions

The responsible life cycle management of PV systems is not only becoming a compliance requirement, e.g. in the European Union where PV module recycling is already mandated by the EU WEEE directive, but also offers opportunities to positively influence project economics and the LCOE of a given PV project by leveraging cost-effective, high-value recycling technologies. In addition to creating value from secondary resources, PV recycling services help de-risk the decommissioning and end-of-life phase for PV asset owners. ■

Authors

Dr. Parikhit Sinha is a Senior Scientist in the Global Sustainability group at First Solar, where he leads the company's research on environmental product safety and life cycle assessment. He is a member of the International Energy Agency PVPS Task 12 Committee on PV Environmental, Health, and Safety, and a former study director at the U.S. National Academy of Sciences. He has a Ph.D. in atmospheric sciences from the University of Washington, Seattle, and a B.A. in environmental engineering from Harvard University.



Sukhwant Raju is the Global Director of Recycling Operations and Services at First Solar where he leads the development of PV module recycling technology and manages a global recycling team, which currently operates commercial-scale recycling plants in Europe, Asia, and the United States. He has more than 28 years of experience in the chemical and environmental industry and has been involved in the technical design, operations, and business management of chemical treatment, recycling, and hazardous waste management operations at several companies. Sukhwant is a chemical engineer with an Executive MBA degree from David Eccles School of Business at University Of Utah.



Karen Drozdiak is the Sustainability Communications and Analysis Manager at First Solar, where her responsibilities include data analysis, market research, internal and external sustainability communications, and corporate sustainability reporting. She has worked in the PV industry for the past six years and recently participated in the development of the industry's first sustainability leadership standard, led by NSF International and the Green Electronics Council. Karen has a B.A. in History and U.S. Foreign Policy from Columbia University and an M.A. in International Relations and Diplomacy from the Anglo-American University in Prague.



Andreas Wade is the global sustainability director at First Solar where he has been in charge of the company's sustainability programme for the past three years. He previously supported business development as director of technical relations and public affairs in Europe. Prior to joining First Solar, Andreas designed and implemented the life cycle management strategy for Q-Cells and worked as a process engineer at Shell Exploration and Production. Andreas is the deputy operating agent of the International Energy Agency's PVPS Task 12 Committee and currently also leads the development of a minimum recycling standard for PV modules within the Technical Committee 111X Working Group 6 of CENELEC.



References

- [1] C. P. Baldé, F. Wang, R. Kuehr and J. Huisman, "The Global E-Waste Monitor", United Nations University, IAS-SCYCLE, Bonn, Germany, 2014.
- [2] S. Weckend, A. Wade, G. Heath and K. Wambach, "End-of-Life Management: Photovoltaic Panels", International Renewable Energy Agency (IRENA), International Energy Agency Photovoltaic Power Systems Program Task 12 (IEA PVPS Task 12), Abu Dhabi, Amsterdam, 2016.
- [3] E. Butler, "SEIA National PV Recycling Program", in *Solar Power International*, Las Vegas, 2016.
- [4] K. Komoto and J. Lee, "End-of-Life Management of Photovoltaic Panels: Trends in PV Module Recycling Technologies", IEA-PVPS T12-10:2017, 2017.
- [5] D. Ravikumar, P. Sinha, T. Seager and M. Fraser, "An anticipatory approach to quantify energetics of recycling CdTe photovoltaic systems", *Prog. Photovolt: Res. Appl.*, vol. 24, pp. 735-746, 2015.
- [6] Eurostat, "Recycling – Secondary Material Price Indicator", 2014. [Online]. Available: http://ec.europa.eu/eurostat/statistics-explained/index.php/Recycling_%E2%80%93_secondary_material_price_indicator#Glass.
- [7] Desert Stateline, LLC; LSA Associates, Inc., "Closure, Decommissioning, And Reclamation Plan - Stateline Solar Farm Project San Bernadino County, California", U.S. Bureau of Land Management, Needles, San Bernadino County, California, USA, 2014.
- [8] Schimpf, G. et.al.; Gehrlicher Solar AG, "Untersuchungen zum Recycling einer konkreten PV Anlage", Forum Solarpraxis, Berlin, Germany, 2011.
- [9] Silver State Solar Power South, LLC; CH2MHill, "Facility Decommissioning Plan Silver State Solar South Project", Bureau of Land Management, Las Vegas, NV, USA, 2014.
- [10] J. E. Mason, V. M. Fthenakis, T. Hansen and H. C. Kim, "Energy Payback and Life-cycle CO2 Emissions of the BOS in an Optimised 3.5MW PV Installation", *Prog. Photovolt: Res. Appl.*, vol. 14, no. 2, pp. 179-190, 2006.
- [11] V. Fthenakis, Z. Zhang and J. Choi, "Cost Optimisation of Decommissioning and Recycling CdTe PV Power Plants", in *Proc. IEEE PVSC*, Washington D.C., 2017.
- [12] A. Cates and R. Stiffer, "PV Power Plant Net Decommissioning Cost Model Technical Report", Environmental Resources Management (ERM), San Francisco, CA., 2017.